


79633 – PNEUMATIC THREE BUTTON HANDLE FOR THREE PILOT SIGNALS WITH TRIGGER LH

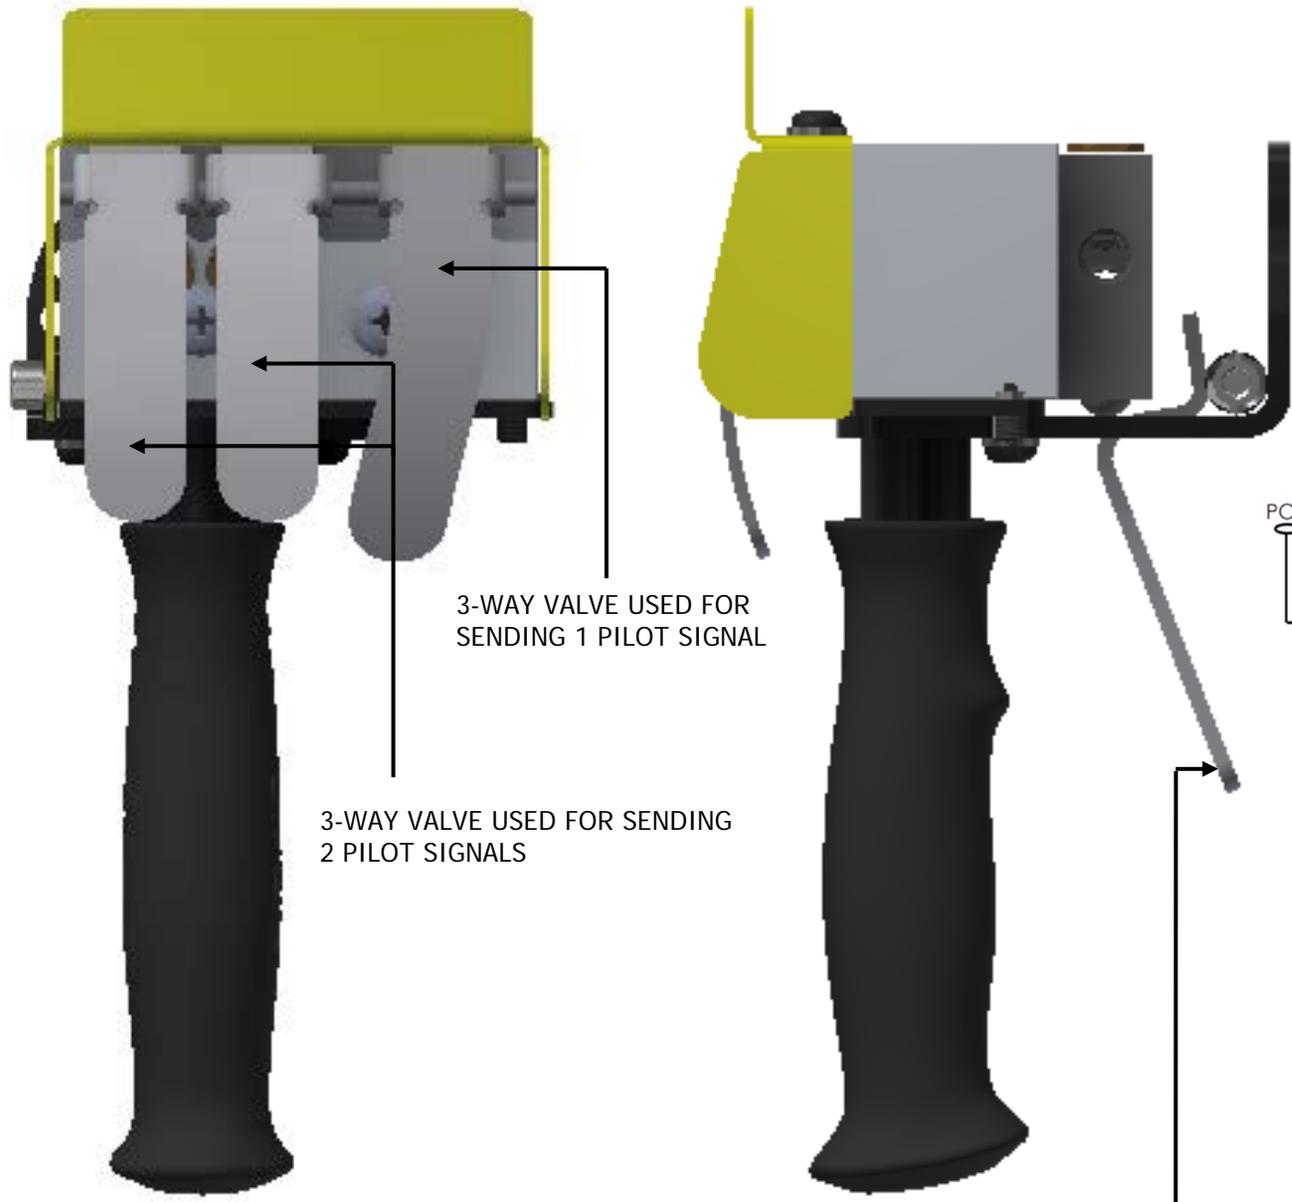

3-WAY VALVE USED FOR SENDING 1 PILOT SIGNAL

3-WAY VALVE USED FOR SENDING 2 PILOT SIGNALS

TRIGGER: 3-WAY VALVE USED FOR SENDING 1 PILOT SIGNAL

- TEMPERATURE RANGE: 32 TO 125 DEGREES F
- MAXIMUM PRESSURE: 100 PSI
- DUAL BLOCK PORTS:
 - PORT 1: 1/4" NPT PILOT SIGNAL
 - PORT 2: 1/4" NPT AIR SUPPLY
 - PORT 3: 1/4" NPT PILOT SIGNAL
- SINGLE BLOCK PORTS
 - PORT 1: 1/4" NPT PILOT SIGNAL
 - PORT 2: 1/4" NPT AIR SUPPLY
- TRIGGER BLOCK PORTS
 - PORT 1: 1/8" NPT AIR SUPPLY
 - PORT 2: 1/8" NPT PILOT SIGNAL
- HARDWARE TO BE SNUG TIGHT
- REQUIRES CLEAN DRY AIR

79626 DUAL BLOCK

79598 SINGLE BLOCK

