

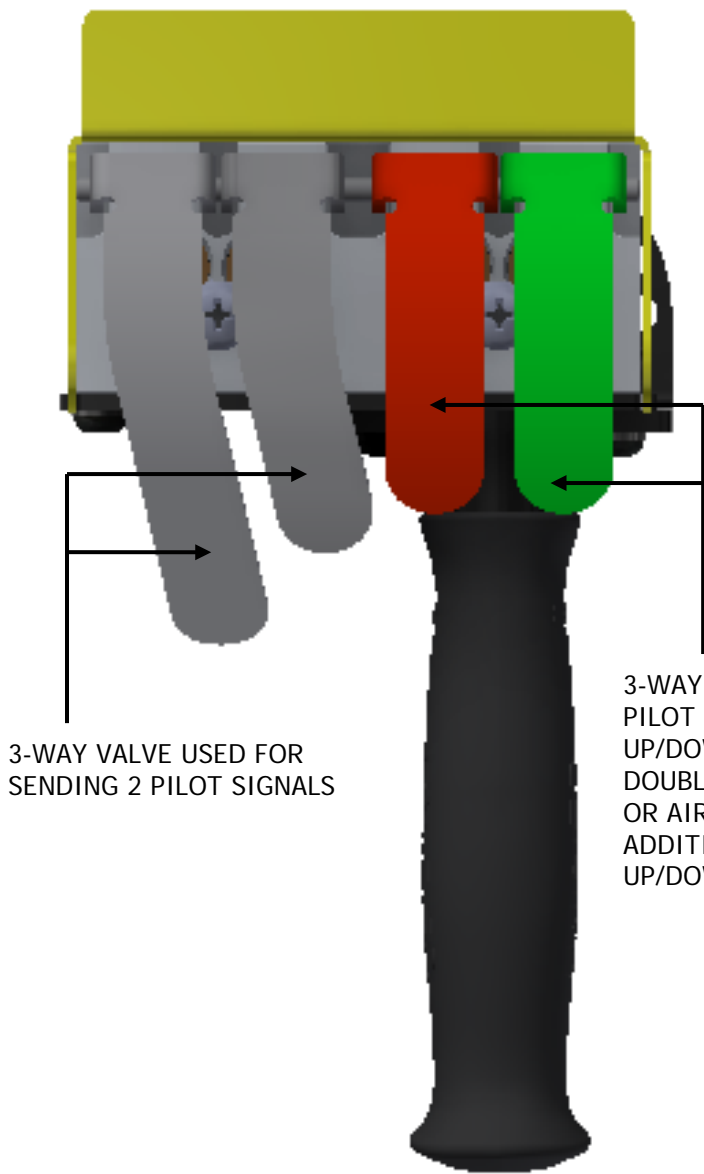


79689 – PNEUMATIC FOUR BUTTON HANDLE ASSEMBLY FOR UP/DOWN WITH FOUR PILOT SIGNALS RH

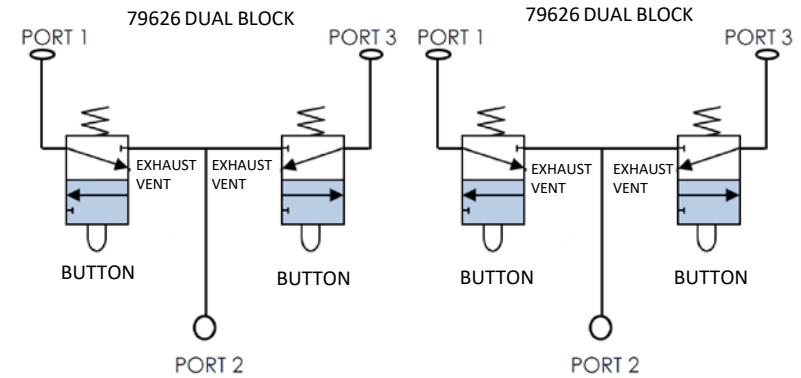

3-WAY VALVE USED FOR SENDING 2 PILOT SIGNALS

3-WAY VALVE FOR SENDING PILOT SIGNALS FOR UP/DOWN. FOR USE WITH DOUBLE ACTING CYLINDER OR AIR HOISTS THAT USE AN ADDITIONAL VALVE FOR UP/DOWN MOTION

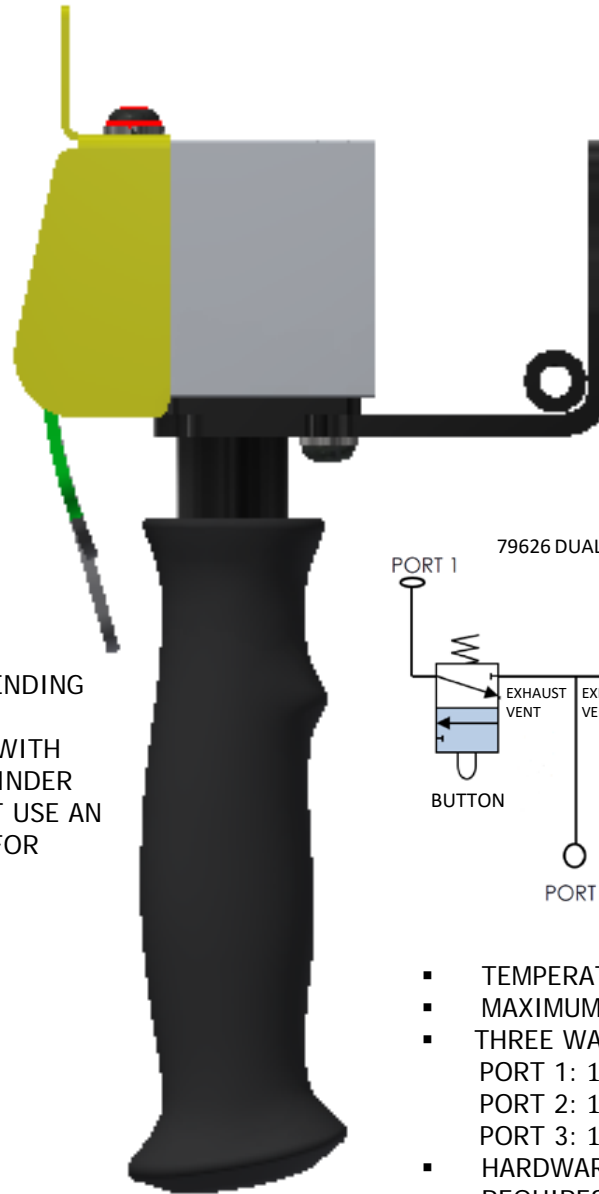

- TEMPERATURE RANGE: 32 TO 125 DEGREES F
- MAXIMUM PRESSURE: 100 PSI
- THREE WAY VALVE PORTS
 PORT 1: 1/4" NPT PILOT SIGNAL
 PORT 2: 1/4" NPT AIR SUPPLY
 PORT 3: 1/4" NPT PILOT SIGNAL
- HARDWARE TO BE SNUG TIGHT
- REQUIRES CLEAN DRY AIR