

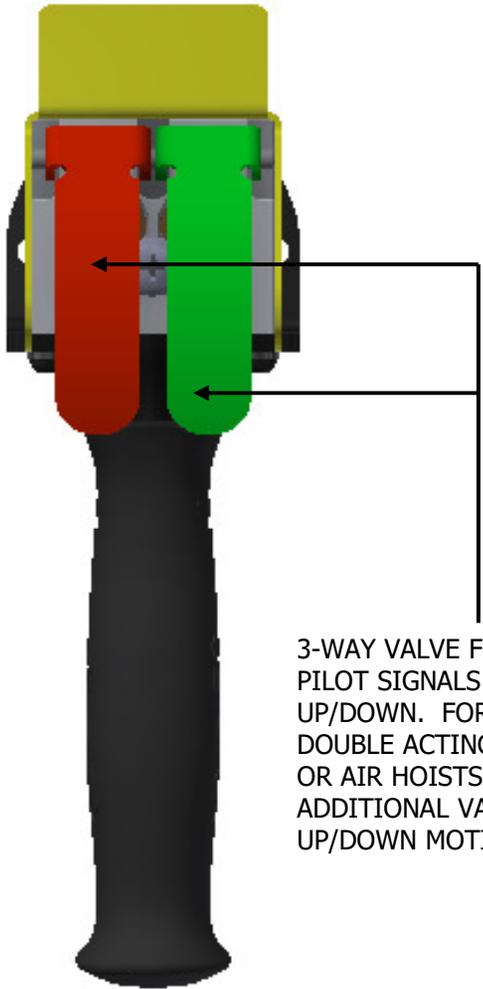


79692 – PNEUMATIC TWO BUTTON HANDLE ASSEMBLY FOR UP/DOWN USING TWO PILOT SIGNALS

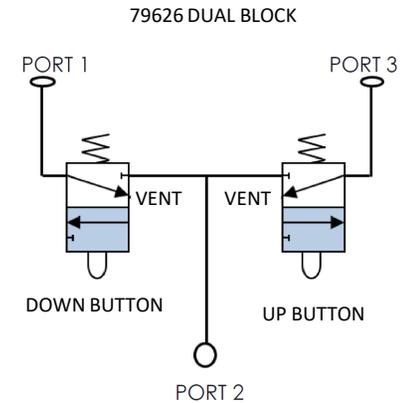

3-WAY VALVE FOR SENDING PILOT SIGNALS FOR UP/DOWN. FOR USE WITH DOUBLE ACTING CYLINDERS OR AIR HOISTS THAT USE AN ADDITIONAL VALVE FOR UP/DOWN MOTION

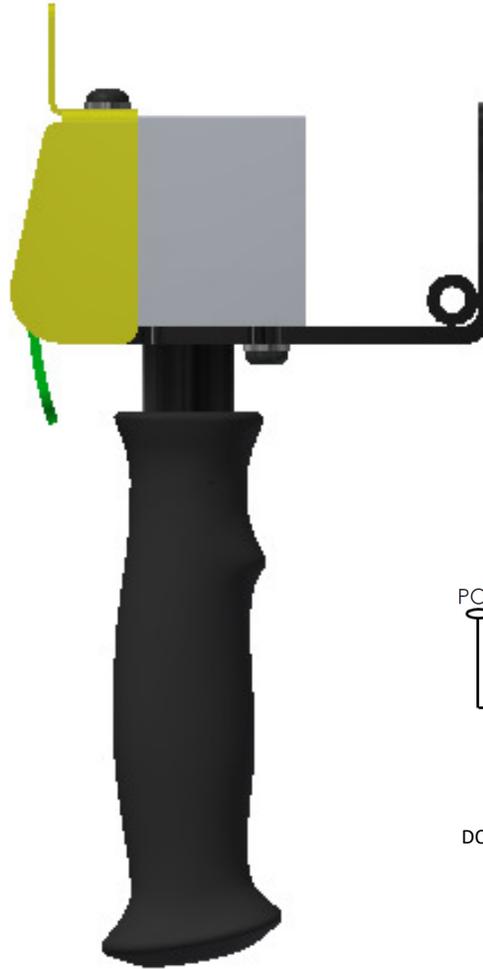

- TEMPERATURE RANGE: 32 TO 125 DEGREES F
- MAXIMUM PRESSURE: 100 PSI
- PORT 1: 1/4" NPT PILOT SIGNAL
- PORT 2: 1/4" NPT AIR SUPPLY
- PORT 3: 1/4" NPT PILOT SIGNAL
- HARDWARE TO BE SNUG TIGHT
- REQUIRES CLEAN DRY AIR