
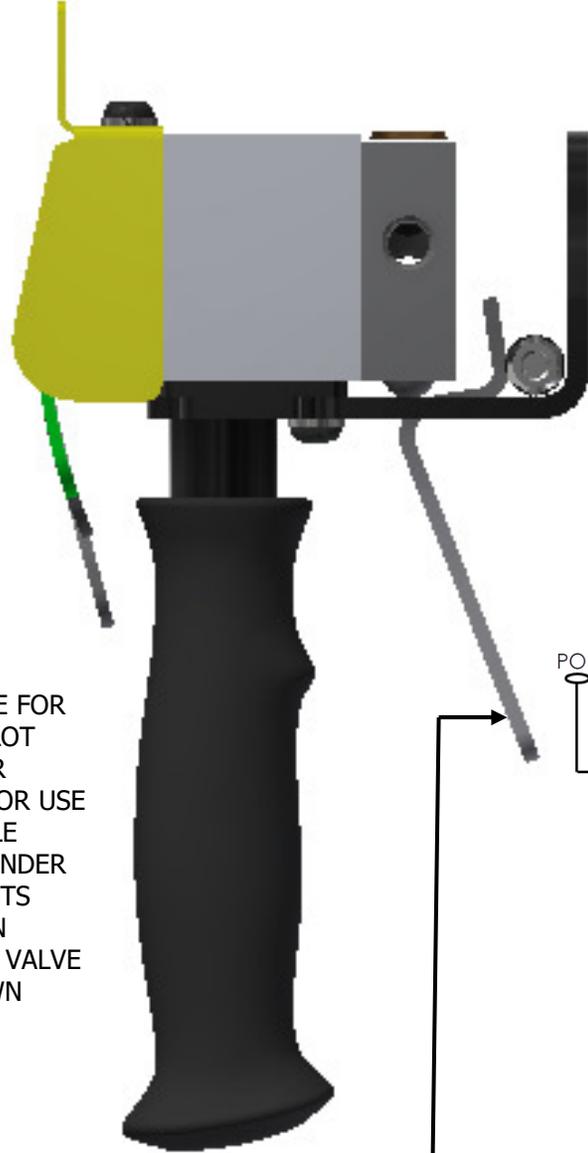


# 79691 – PNEUMATIC FOUR BUTTON HANDLE ASSEMBLY FOR UP/DOWN WITH FOUR PILOT SIGNALS RH WITH TRIGGER

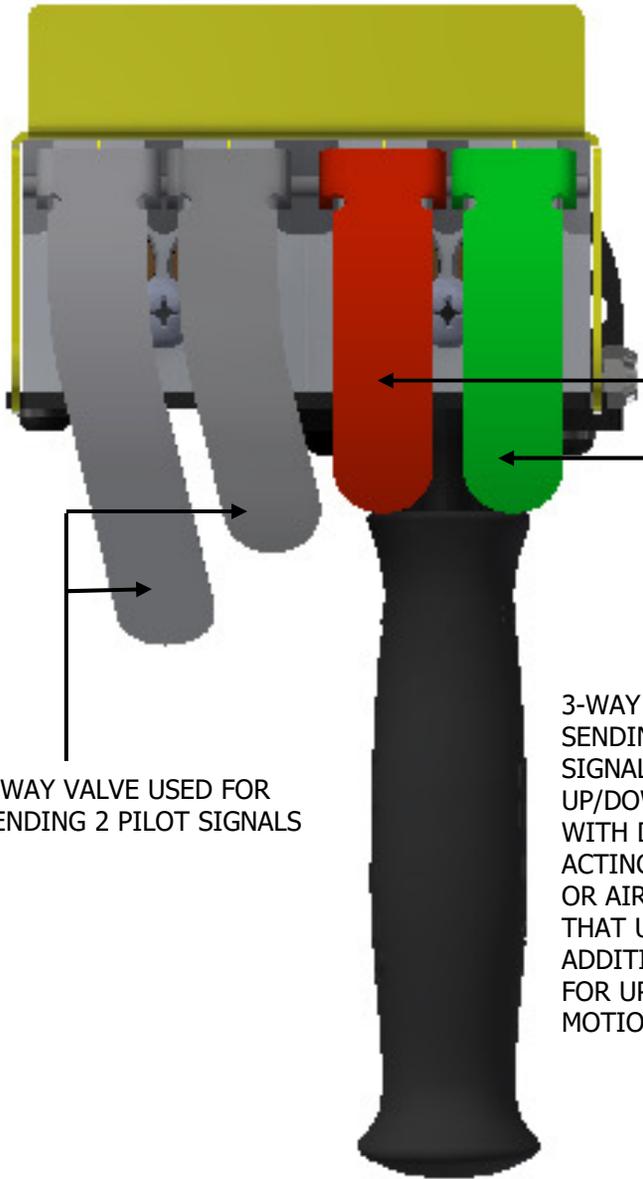

- TEMPERATURE RANGE: 32 TO 125 DEGREES F
- MAXIMUM PRESSURE: 100 PSI
- DUAL BLOCK PORTS:
  - (2) PORT 1: PILOT SIGNAL
  - (2) PORT 2: AIR SUPPLY
  - (2) PORT 3: PILOT SIGNAL
- TRIGGER BLOCK PORTS
  - PORT 1: AIR SUPPLY
  - PORT 2: PILOT SIGNAL
- HARDWARE TO BE SNUG TIGHT
- REQUIRES CLEAN DRY AIR

3-WAY VALVE USED FOR SENDING 2 PILOT SIGNALS

3-WAY VALVE FOR SENDING PILOT SIGNALS FOR UP/DOWN. FOR USE WITH DOUBLE ACTING CYLINDER OR AIR HOISTS THAT USE AN ADDITIONAL VALVE FOR UP/DOWN MOTION

TRIGGER: 3-WAY VALVE USED FOR SENDING 1 PILOT SIGNAL

