



79694 – PNEUMATIC FOUR BUTTON HANDLE ASSEMBLY FOR UP/DOWN TWO PILOT SIGNALS RH WITH TRIGGER

- TEMPERATURE RANGE: 32 TO 125 DEGREES F
- MAXIMUM PRESSURE: 100 PSI
- TWO WAY VALVE PORTS
 - PORT 1: 1/4" NPT AIR SUPPLY
 - PORT 2: 1/4" NPT UP/FILL
 - PORT 3: 1/4" NPT DOWN/EXHAUST
- THREE WAY VALVE PORTS
 - PORT 1: 1/4" NPT PILOT SIGNAL
 - PORT 2: 1/4" NPT AIR SUPPLY
 - PORT 3: 1/4" NPT PILOT SIGNAL
- TRIGGER BLOCK PORTS
 - PORT 1: 1/8" NPT AIR SUPPLY
 - PORT 2: 1/8" NPT PILOT SIGNAL
- HARDWARE TO BE SNUG TIGHT
- REQUIRES CLEAN DRY AIR

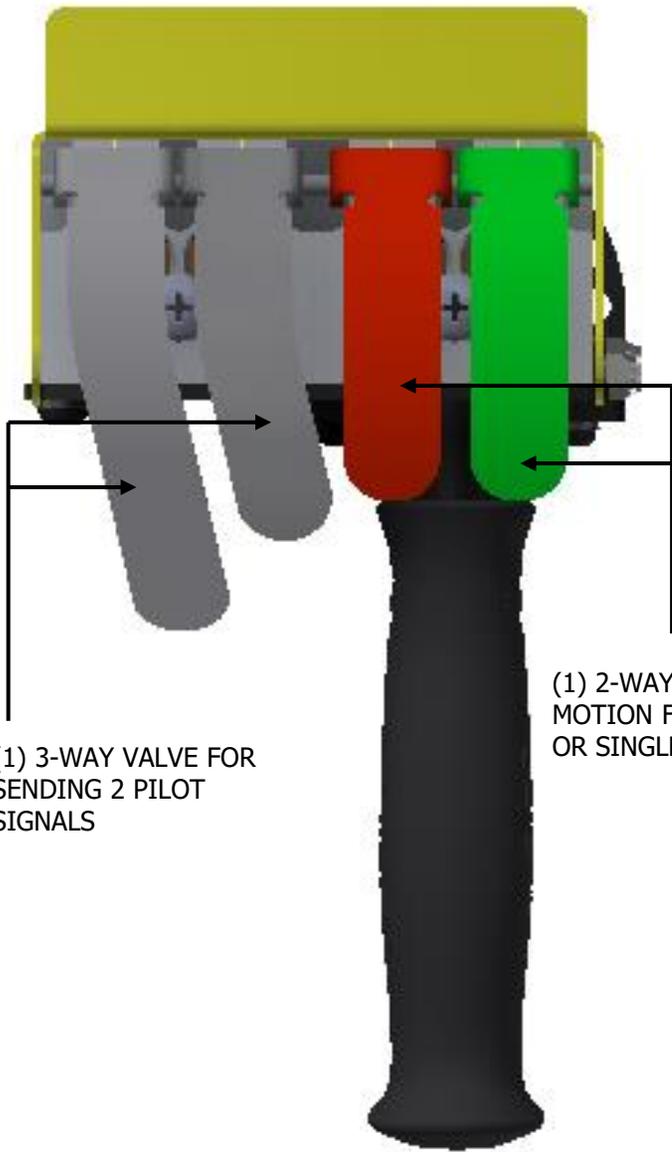


(1) 2-WAY VALVE FOR UP/DOWN MOTION FOR AN AIR BALANCER OR SINGLE ACTING CYLINDER

(1) 3-WAY VALVE FOR SENDING 2 PILOT SIGNALS

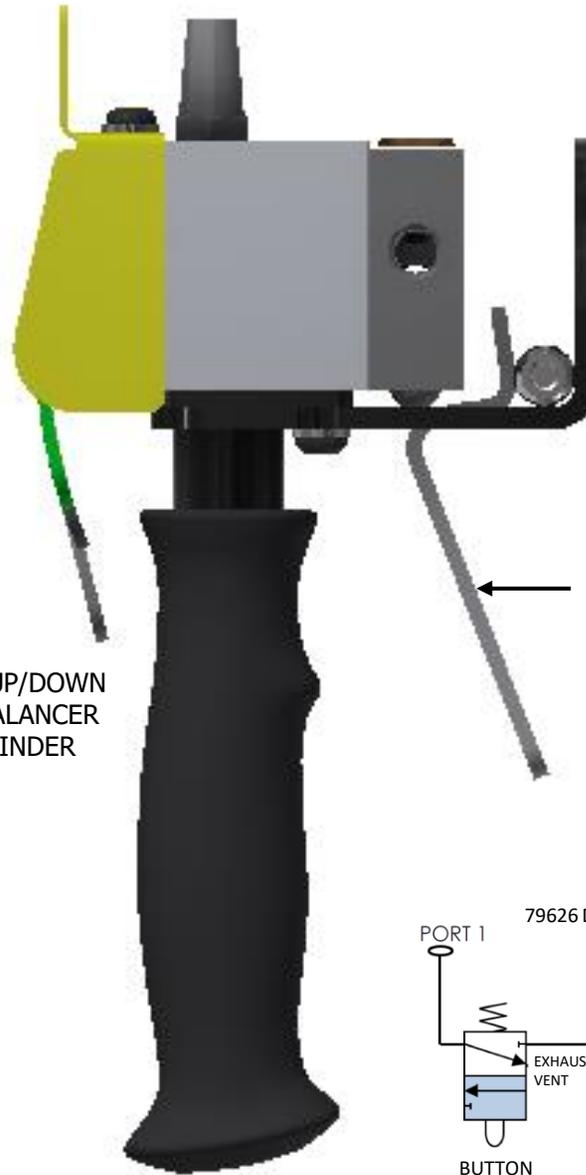


TRIGGER: 3-WAY VAL' USED FOR SENDING 1 PILOT SIGNAL

79597 TRIGGER BLOCK

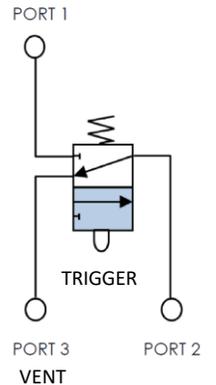

79626 DUAL BLOCK

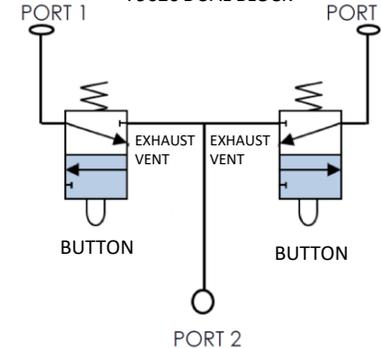

79626 DUAL BLOCK

